


BULL DOG CAPILLARY STRAINER-ASSEMBLIES

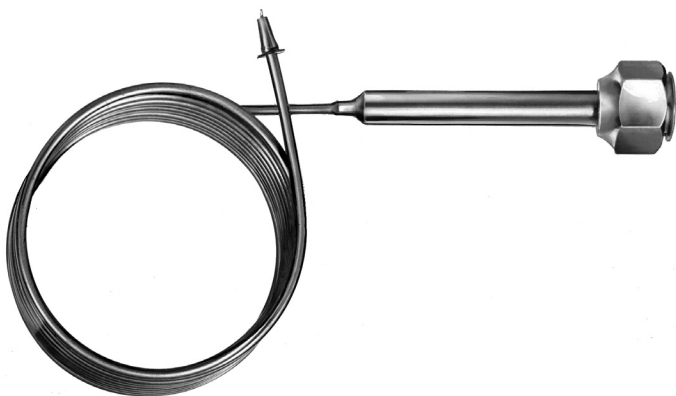

18 Applications FROM 8 Assemblies

Capillary Strainer Assemblies have oversized monel strainer elements of 150 mesh screen for maximum filtration and dirt retention. They have been engineered to provide accurate refrigerant metering for specific applications without field adjustment or cutting.

Assemblies are graduated according to a uniform pattern with "A" having the highest filtration, then "B" "C", etc., through "H", which has the lowest restriction of all. The first number or numbers following the letter indicate the capillary tube length in feet—the last two numbers indicate the inside diameter of the capillary tube in thousandths of an inch.


Inlet fitting is supplied with 3/8" brass flare nut.

Compressor Horsepower	Evaporator Temperature		
	Low	Medium	High
1/10 - 1/9 - 1/8	A-1631	B-831	C-836
1/6 - 1/5	B-831	C-836	D-842
1/3 - 1/4	C-836	D-842	E-1050
1/2	D-842	E-1050	F-855
3/4	E-1050	F-855	G-870
1	F-855	G-870	H-780

CAPILLARY STRAINERS

Illustrated are capillary strainers which are most common in refrigeration use. Construction is copper with monel cloth strainer.

PART NUMBER	OVERALL LENGTH "A"	"B" ID	"C" ID	TUBE O.D.
2076	3	.253 - .257	.127 - .131	3/8
2611	2-1/4	.190 - .194	.083 - .087	1/4
2612	2-1/4	.190 - .194	.087 - .091	1/4
2613	2-1/8	.253 - .257	.087 - .091	5/16
2632	2-1/8	.253 - .257	.101 - .105	5/16

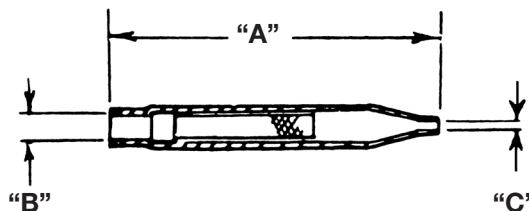

CAPILLARY TUBING

Capillary tubing listed below is of uniform plug drawn quality. Shipped in coils of approximately 100 ft.

CATALOG NUMBER	I.D.	O.D.	APPROX. WT. PER 100' COIL	CATALOG NUMBER	I.D.	O.D.	APPROX. WT. PER 100' COIL
03181	.031	.081	1.7	06025	.060	.125	3.6
03687	.036	.087	1.9	06425	.064	.125	3.5
04293	.042	.093	2.0	07025	.070	.125	3.3
04999	.049	.099	2.2	08040	.080	.140	4.0
04925	.049	.125	3.9	08545	.085	.145	4.2
05525	.055	.125	3.8	09050	.090	.150	4.4

Tolerance = +/- .002 on O.D.; +/- .001 on I.D.

30



REFRIGERATION RESEARCH, INC.