


RECEIVERS FOR ROTALOCK FITTINGS

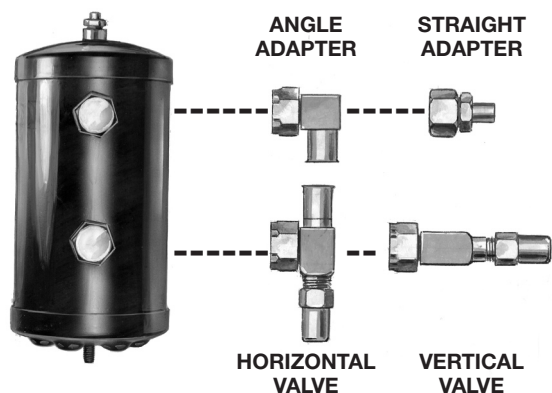

Receivers below are of hydrogen copper brazed construction insuring maximum cleanliness and strength.

These premium receivers are designed for either horizontal or vertical mounting and for use with Rotalock valves and fittings to make them as universal in application as possible. All of these receivers have "Leek Pruf"[®] fusible plugs installed and are powder coated.

Rotalock receivers do not include valves or fittings, but are supplied with Teflon Gasket installed. These receivers are pressure tested for 500 p.s.i. working pressure.

PART NUMBER	*PUMP DOWN CAPACITY	DIAMETER & LENGTH OVER END CAPS	INLET FITTING	OUTLET FITTING	MOUNT	LEEK PRUF FUSIBLE PLUG	WEIGHT POUNDS	UL CODE IDENT.
3392	4 lb.	4 x 10	1" Rotalock	1" Rotalock	Horiz. or Vert.	R	4.7	KN
3388	6 lb.	5 x 10	1" Rotalock	1" Rotalock	Horiz. or Vert.	R	7.3	EN
3390	13 lb.	5 x 20	1" Rotalock	1" Rotalock	Horiz. or Vert.	R	12.3	EN
3389	10 lb.	6 x 12	1" Rotalock	1" Rotalock	Horiz. or Vert.	R	11.1	MN
3413	16 lb.	6 x 18	1" Rotalock	1" Rotalock	Horiz. or Vert.	R	14.5	MN
3391	22 lb.	6 x 24	1" Rotalock	1" Rotalock	Horiz. or Vert.	R	18.3	MN
3387	28 lb.	6 x 30	1" Rotalock	1" Rotalock	Horiz. or Vert.	R	22.0	MN

*90% AT 90° for R22, R134a and R502 - For R12 multiply by 1.1 - For R402b and R404a multiply by 0.9
 P-Permanent R-Removable 500 psi Working Pressure

CE marking available upon request.

UL LISTED
 File No. SA 2400 Vol. 1

AVAILABLE 1" ROTALOCK VALVES AND FITTINGS FOR RECEIVERS

Horizontal Valves

27718 - 3/8 SAE flare
 27689 - 1/2 SAE flare
 27691 - 5/8 SAE flare

Horizontal Valves

23075 - 3/8 I.D. Sweat
 24601 - 1/2 I.D. Sweat
 24602 - 5/8 I.D. Sweat

Vertical Valves

27742 - 3/8 SAE flare
 27035 - 1/2 SAE flare
 27036 - 5/8 SAE flare

Vertical Valves

24606 - 3/8 I.D. Sweat
 24490 - 1/2 I.D. Sweat
 24491 - 5/8 I.D. Sweat

Straight Adapters

24246 - 3/8 I.D. Sweat
 24247 - 1/2 I.D. Sweat
 24248 - 5/8 I.D. Sweat

Teflon Gasket No. 24591

Angle Adapters

24957 - 3/8 SAE flare
 24958 - 1/2 SAE flare
 24959 - 5/8 SAE flare

Angle Adapters

24252 - 3/8 I.D. Sweat
 24253 - 1/2 I.D. Sweat
 24254 - 5/8 I.D. Sweat

